BAIJAX语家祥



FLUTED WALL PANEL

The wooden grid based on nano bamboo and wood fiber replaces the traditional wooden grid, which is more environmental friendly, moisture-proof and does not deform.

The traditional wooden grid will be moldy and deformed after it is used for a long time. The cost is very high and is not environmental friendly.

Now, the advantages of using nano bamboo and wood fiber material are: environmental protection, waterproof, moisture-proof, mildew proof, moth proof, no deformation, various colors, light, installed, clean, firm, durable and nice appearance.

It is very popular by lots of customers as soon as it accesses to the domestic and overseas market!











Waterproof

Insect prevention


Environmental protection

Flame-retardant

HOLLOW GRID PLATE



Name: 170 Hollow fluted wall panel




Length and width: 170*3000 (mm) Thickness: 23.5mm Environmental protection grade: E0 Fire rating: B1



Name: 100 Arc fluted wall panel



Length and width: 100*3000 (mm) Thickness: 19.5mm Environmental protection grade: E0 Fire rating: B1

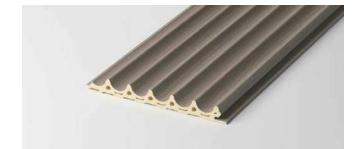

Name: 157 Inner arc grille

18.5 157

Length and width: 157*3000 (mm) Thickness: 18.5mm Environmental protection grade: E0 Fire rating: B1



Name: 150 Arc fluted wall panel

<u>100000</u>]; 150

Length and width: 150*3000 (mm) Thickness: 15mm Environmental protection grade: E0 Fire rating: B1



Name: 115 Wave fluted wall panel

(0) $\langle 0 \rangle 0 \rangle 0 \rangle 0 \rangle 0 \rangle$ くつらしば 115


Length and width: 115*3000 (mm) Thickness: 13mm Environmental protection grade: E0 Fire rating: B1

Name: 160 triangular grille


<u>}~~~</u>]; 4 160

Length and width: 160*3000 (mm) Thickness: 15mm Environmental protection grade: E0 Fire rating: B1

SOLID GRID PLATE

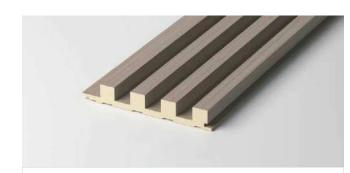


Name: 153 * 24 solid fluted wall panel




Length and width: 153*3000 (mm) Thickness: 24mm Environmental protection grade: E0 Fire rating: B1



Name: 110 * 18 solid fluted wall panel




Length and width: 110*3000 (mm) Thickness: 18mm Environmental protection grade: E0 Fire rating: B1



Name: 70 Inner arc solid grille

Length and width: 70*3000 (mm) Thickness: 15mm Environmental protection grade: E0 Fire rating: B1




15 39


Length and width: 40*3000 (mm) Thickness: 15mm Environmental protection grade: E0 Fire rating: B1



Name: 120 * 9 solid fluted wall panel



Length and width: 120*3000 (mm) Thickness: 9mm Environmental protection grade: E0 Fire rating: B1

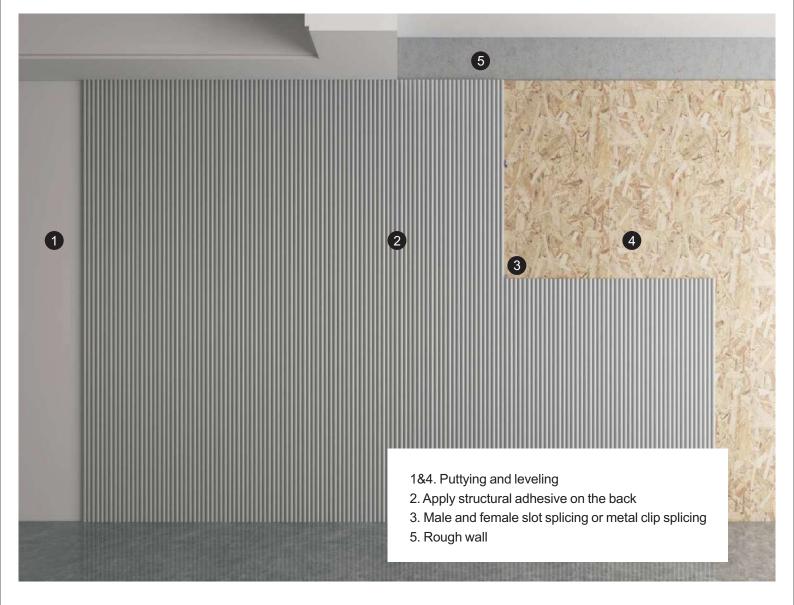




- 1. Apply structural adhesive on the back
- 2. Male and female slot splicing or metal clip splicing
- 3. Puttying and leveling

COLOUR - Metal series



COLOUR - Metal series

Thickness: 0.15mm

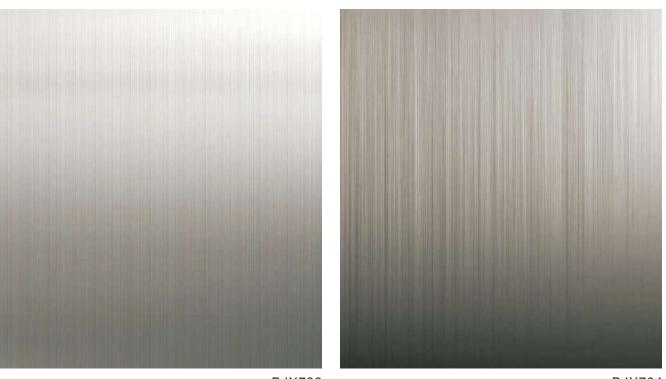

BJX703















COLOUR - Solid color series











COLOUR - Solid color series









COLOUR - Cloth pattern series

Thickness: 0.14~0.16mm





COLOUR - Stone series

Thickness: 0.16mm

